

**Scan for more info!**



Owners Manual  
Quick Install  
Quick Sizing  
Install Layout  
Parts List

**CR-2-PB**  
**Countertop Push Button  
Artisan Water System**




**Specifications:**

**80 Liters per hour @ 40° or less**  
**Self-Contained Refrigeration System**  
**Compressor: 1/3 H.P.**  
**Refrigerant: R134a CFC-free**  
**BTU per hour: 2600 ave**  
**Operating Temperature Range: 40°-100°**  
**Electrical: 120v - 14.9 Amps**  
**Carbonator: 1/3 H.P.**  
**Water Bath: 6 Gallons**  
**Ice Bank: 25 lbs**  
**20" W x 27" D x 24.5" H**  
**Weight: 160 lbs**

**Sparkling & Chilled Water on Tap:**

- **Cold Carbonation for better long lasting sparkling water**
- **Push Button dispensing; ideal for self-service use**
- **European design, mirrored finish Stainless Steel exterior**
- **Clearance for bottles or carafes up to 12" tall**
- **Available in 3 valve configuration for ambient temperature water**

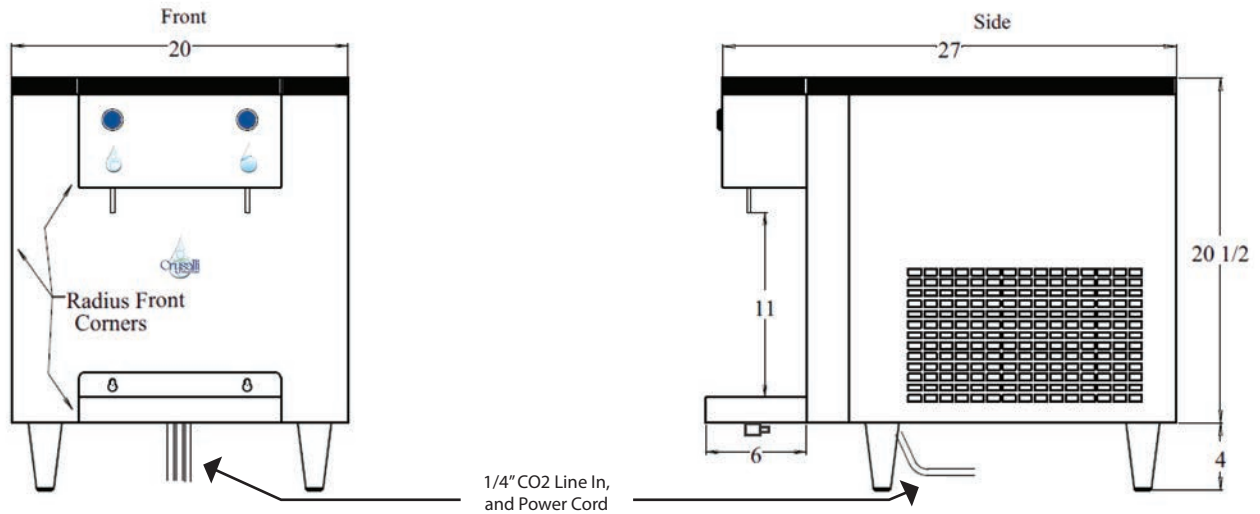

- 3/8" water inlet connector
- Air intake at rear with Air Filter
- 20" Wide x 27" Deep x 24.5" High
- Up to 2 oz per sec flow rate of sparkling water
- Allow for 6" rear & side clearance around unit for air flow
- Shipping Weight: 160 lbs
- 4.25" Legs
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- Electrical: 120v - 14.9 Amps
- 7' Overflow Drain Hose, clear
- Drip Drain Pan: 1/2" barb fitting

### Required Accessories Checklist:



**CR-3741**

Primary High Pressure CO2 Regulator for CO2 tank



**CR-KIT-CT**

Installation kit for Countertop units, CR-1 & CR-2  
Includes: 50PSI Water Pressure Regulator, fittings and oetiker clamps, extra tubing to install the filter systems and Countertop unit



**CR-24FCP with Prefilter**

**CR-24FC without Prefilter**

Twin Filter System with Compact Fibredyne filters, 3/4" inlet & outlet. 19" High x 17" Wide 5 gpm, 30,000 gal, TOC & 1/2 micron filtration

**Customer supplied CO2 Tank required**



NSF Certified under NSF/ANSI Standard 18

