



Project:

Scan for more info!



Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CR-2-PB
**Countertop Push Button
Artisan Water System**




Specifications:

80 Liters per hour @ 40° or less
Self-Contained Refrigeration System
Compressor: 1/3 H.P.
Refrigerant: R134a CFC-free
BTU per hour: 2600 ave
Operating Temperature Range: 40°-100°
Electrical: 120v - 14.9 Amps
Carbonator: 1/3 H.P.
Water Bath: 6 Gallons
Ice Bank: 25 lbs
20" W x 27" D x 24.5" H
Weight: 160 lbs

Sparkling & Chilled Water on Tap:

- **Cold Carbonation for better long lasting sparkling water**
- **Push Button dispensing; ideal for self-service use**
- **European design, mirrored finish Stainless Steel exterior**
- **Clearance for bottles or carafes up to 12" tall**
- **Available in 3 valve configuration for ambient temperature water**

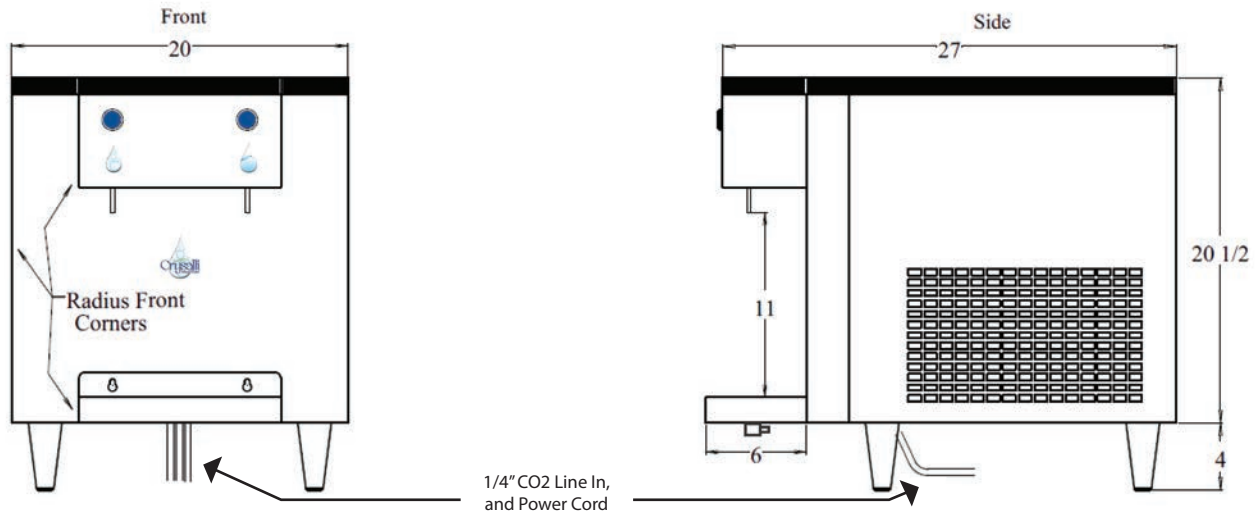

- 3/8" water inlet connector
- Air intake at rear with Air Filter
- 20" Wide x 27" Deep x 24.5" High
- Up to 2 oz per sec flow rate of sparkling water
- Allow for 6" rear & side clearance around unit for air flow
- Shipping Weight: 160 lbs
- 4.25" Legs
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- Electrical: 120v - 14.9 Amps
- 7' Overflow Drain Hose, clear
- Drip Drain Pan: 1/2" barb fitting

Required Accessories Checklist:



CR-3741

Primary High Pressure
CO2 Regulator for
CO2 tank



CR-KIT-CT

Installation kit for Countertop units, CR-1 & CR-2
Includes: 50PSI Water Pressure Regulator,
fittings and oetiker clamps,
extra tubing to install the filter
systems and Countertop unit



CR-24FCP with Prefilter

CR-24FC without Prefilter

Twin Filter System with Compact
Fibredyne filters, 3/4" inlet & outlet.
19" High x 17" Wide 5 gpm, 30,000 gal,
TOC & 1/2 micron filtration

Customer supplied CO2 Tank required



NSF Certified under NSF/ANSI Standard 18

