



Project:

**Scan for more info!**



Owners Manual  
Quick Install  
Quick Sizing  
Install Layout  
Parts List

## **CP2000-R-UC-BH**

**Low Volume Still & Sparkling  
Artisan Water System  
Remote Undercounter Mount**





## **Specifications:**

**50 12oz drinks per hour @ 45° or less  
Self-Contained Refrigeration System  
Compressor: 1/9 H.P.  
Operating Temperature Range: 40°-100°  
Electrical: 120v - 4.2 Amps  
Water Bath & Ice Bank Chiller  
11.75" W x 17.5" D x 16.5" H  
Weight: 80 lbs**

## **Sparkling & Chilled Water on Tap:**

- Perfect for Office, Hotel Suites, Winery's & Residential
- Cold Carbonation for better long lasting sparkling water
- Water dispensing temperature average between 36-45°
- Remote application with built in cold water re-circ for installation up to 6' in distance.
- Bulkhead fittings for easy hookup to faucet. Extra fittings and water regulator supplied with CR-Kit-CPUC

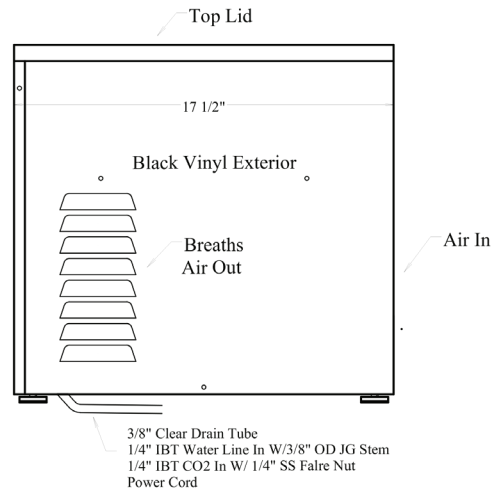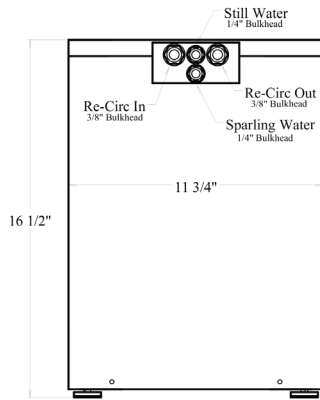

- 11.75" Wide x 17.5" Deep x 16.5" High
- 50 12oz drinks @ 45° or less per hour
- Allow for 6" rear & side clearance around unit for air flow
- Shipping Weight: 80 lbs
- 3/8" water connection
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- Electrical: 120v
- 7' Overflow Drain Hose, clear

## Model Options:

- CP2000-RUC-BH: Standard Sparkling and Still Water
- CP2000-RUC-RO: Compatible for RO treated water

## Required Accessories Checklist:



**CR-3741**

Primary High Pressure CO2 Regulator for CO2 tank



**CR-Kit-CPUC**

Kit includes fittings needed to complete the installation of CR-14FC filter system to Remote Chiller CP2000 and Tower or Faucet  
**CP2000 Series Only**



**CR-14FCP with Prefilter**

**CR-14FC without Prefilter**

Single Filter System with Compact Fibredyne filters, 3/4" inlet & outlet. 19" High x 17" Wide 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



**CR-LD38JG**

Inline Leak detector, and audio alarm and Auto-water shut off device. For use with CP2000 series systems



**CBR-V2C**  
 **CBR-V2WHT**

Cobra Tower, Two SSQ adjustable flow faucets  
**Sparkling & Still**

**Customer supplied CO2 Tank required**



ETL Sanitation Listed

Intertek

