



Project:

Scan for more info!



Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CP2000-SW-BH

Low Volume Still Chilled Water Only
Artisan Water System
Remote Undercounter Mount



Specifications:

50 12oz drinks per hour @ 45° or less
Self-Contained Refrigeration System
Operating Temperature Range: 40°-100°
Electrical: 120v - 4.2 Amps
Water Bath: 2.5 Gallons
Ice Bank: 6 lbs
11.75" W x 17.5" D x 16.5" H
Weight: 80 lbs



Chilled Water on Tap:

- **Perfect for Office, Hotel Suites, Wineries & Residential**
- **Water dispensing temperatures average between 36-45°**
- **Remote application with built in cold water re-circ for installation up to 6' in distance**
- **Bulkhead fittings for easy hookup to faucet. Extra fittings and water regulator supplied with unit**

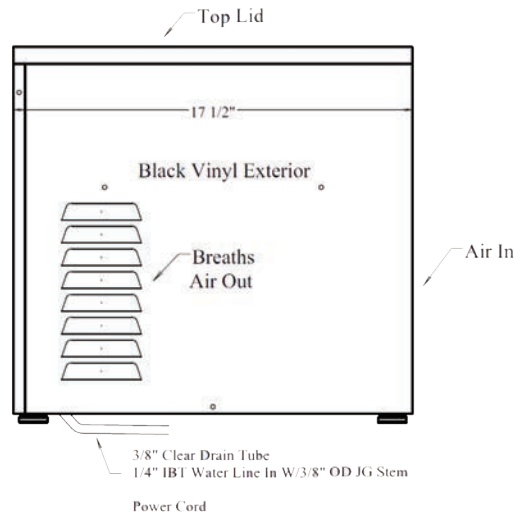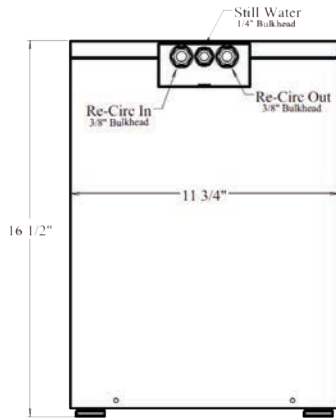

- 11.75" Wide x 17.5" Deep x 16.5" High
- Allow for 6" rear & side clearance around unit for air flow
- Shipping Weight: 80 lbs
- 3/8" water connection
- 9' Electrical cord NEMA 5-15 plug
- Electrical: 120v
- 7' Overflow Drain Hose, clear

Required Accessories Checklist:



CR-3741

Primary High Pressure CO2 Regulator for CO2 tank



CR-Kit-CPUC

Install Kits for Remote Still water chillers, CR-UCW, CR-UCM2-SW2 & and CP2000-SW-BH, Includes: 5' of CR-4L38 Trunkline, various fittings and oetiker clamps, adapters, and extra tubing.
Still Water units only



CR-14FCP with Prefilter

CR-14FC without Prefilter

Single Filter System with Compact Fibredyne filters, 3/4" inlet & outlet. 19" High x 17" Wide 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



CR-LBS10JG

In-line Leak Detector with Auto Shut-Off. For use with any Crysalli chiller system



CBR-V1C
 CBR-V1WHT

Single Valve, Single Product One SSQ Adjustable flow faucet

Customer supplied CO2 Tank required



ETL Sanitation Listed

Intertek

