



Scan for more info!

Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CP2000-CT3

**Compact Counter Mount Artisan Water System
Sparkling, Ambient Still, and Chilled Still Water
Pull Handle faucets**




Specifications:

50 12oz drinks per hour @ 45° or less
Self-Contained Refrigeration System
Compressor: 1/9 HP
Operating Temperature Range: 40°-100°
Electrical: 120v 3.5 Amp 60 HZ
Carbonator: 1.5 GPM
Water Bath: 2.5 Gallons
Ice Bank: 6 lbs
12" W x 20" D x 20.5" Total Height
Weight: 80 lbs

Sparkling & Chilled Water on Tap:

- **Perfect for Office Kitchenettes, Winery's & lower volume self service use**
- **Quiet Run Carbonator motor and tamper proof secured lid**
- **Downward angled spouts for spill free dispensing**
- **Ergonomic Grip handles and locking flow control faucets**
- **Cold Carbonation for better long lasting sparkling water**
- **Water dispensing temperatures average between 36-45°**

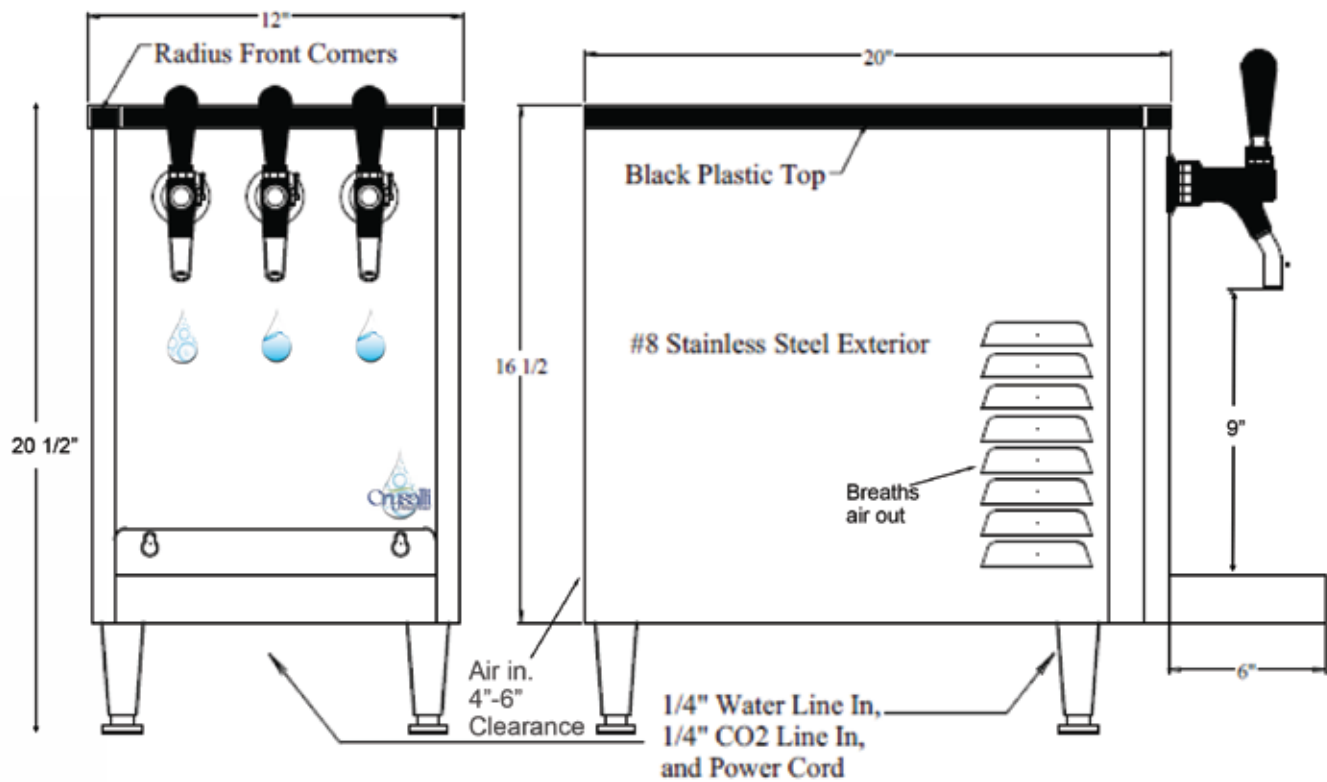

- Air intake at rear
- 12" Wide x 20" Deep x 20.5" High (with Legs)
- 4" Legs
- 50 12oz drinks @45° or less per hour
- Allow for 6" rear & side clearance around unit for air flow
- 1/4" water connection
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- Electrical: 120v 60 Hz
- 7' Overflow Drain Hose, clear
- Shipping Weight: 80 lbs

Required Accessories Checklist:



CR-3741

Primary High Pressure CO2 Regulator for CO2 tank



CR-LD38JG

Inline Leak detector, and audio alarm and Auto-water shut off device. For use with CP2000 series systems



CR-14FCP with Prefilter
 CR-14FC without Prefilter

Single Filter System with Compact Fibredyne filters, 3/4" inlet & outlet. 19" High x 17" Wide 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



CR-Kit-CPCT

Kit includes fittings needed to complete the installation of CR-14FC filter system to Countertop CP2000-CT2 Includes: Pressure Regulator, fittings, and extra tubing
CP2000 Series Only

Customer supplied CO2 Tank required



ETL Sanitation Listed

Intertek

