



Project:

Scan for more info!



Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CP2000-CT2-PB

**Low Volume Still & Sparkling
Artisan Water System
Push Button, Countertop Mount**




Specifications:

**50 12oz drinks per hour @ 45° or less
Self-Contained Refrigeration System
Compressor: 1/9 HP
Electrical: 120v - 60 Hz
Carbonator: 1.5 GPM
Water Bath: 2.5 Gallons
Ice Bank: 6 lbs
12" W x 21.5" D x 20.5" Total Height
Weight: 80 lbs**

Sparkling & Chilled Water on Tap:

- Perfect for Office Kitchenettes, & Residential use
- Compact size for the least intrusive counter space usage
- Designed for dispensing individual servings in a beverage cup
- Push and Hold to dispense buttons - Blue LED Illuminated
- Cold Carbonation for better long lasting sparkling water
- Water dispensing temperatures average between 36-45°

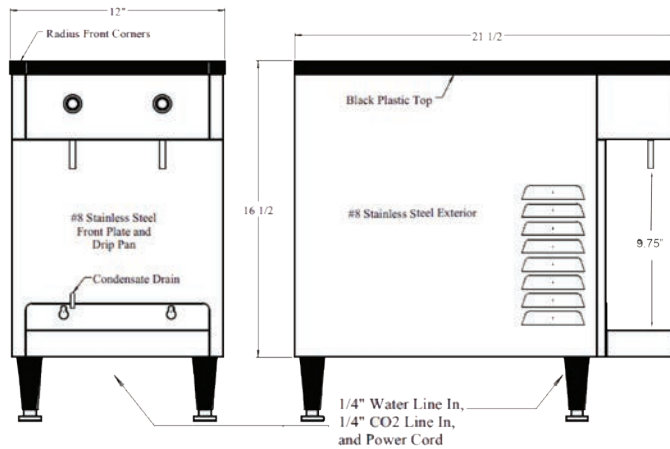

- Air intake at rear
- 12" Wide x 21.5" Deep x 16.5" High (Less Legs)
- 4" Legs
- 50 12oz drinks @ 45° or less per hour
- Allow for 6" rear & side clearance around unit for air flow
- 3/8" water connection
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- Electrical: 120v - 60 Hz
- Condensate Drain into drip pan
- Shipping Weight: 80 lbs

Accessories Checklist:



CR-3741

Primary High Pressure CO2 Regulator for CO2 tank



CR-LBS10JG

In-line Leak Detector with Auto Shut-Off. For use with any Crysalli chiller system



CR-14FCP with Prefilter CR-14FC without Prefilter

Single Filter System with Compact Fibredyne filters, 3/4" inlet & outlet. 19" High x 17" Wide 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



CR-KIT-CPCT

Kit includes fittings needed to complete the installation of CR-14FC filter system to Countertop CP2000-CT2. Includes: Water pressure reducer valve, fittings, and extra tubing.
CP2000 CT Series Only

Customer supplied CO2 Tank required



ETL Sanitation Listed

Intertek

