

Crysalli

Artisan Water

Project:

CP2000-CT2-PB Low Volume Still & Sparkling Artisan Water System Push Button, Countertop Mount



Scan for more info!

Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List




Specifications:

50 12oz drinks per hour @ 45° or less
Self-Contained Refrigeration System
Compressor: 1/9 HP
Electrical: 120v - 60 Hz
Carbonator: 1.5 GPM
Water Bath: 2.5 Gallons
Ice Bank: 6 lbs
12" W x 21.5" D x 20.5" Total Height
Weight: 80 lbs

Sparkling & Chilled Water on Tap:

- Perfect for Office Kitchenettes, & Residential use
- Compact size for the least intrusive counter space usage
- Designed for dispensing individual servings in a beverage cup
- Push and Hold to dispense buttons - Blue LED Illuminated
- Cold Carbonation for better long lasting sparkling water
- Water dispensing temperatures average between 36-45°

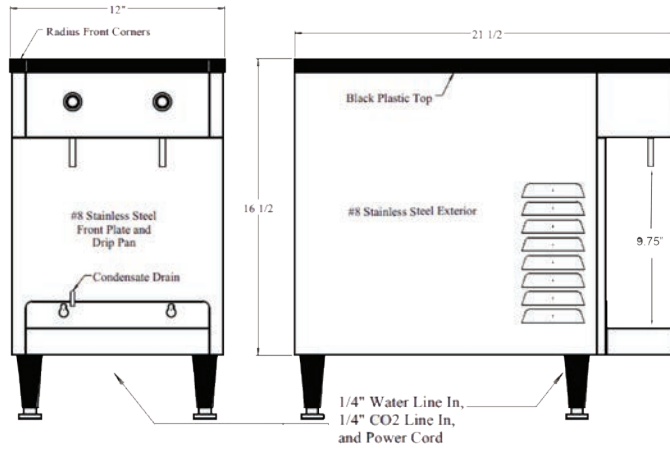

- Air intake at rear
- 12" Wide x 21.5" Deep x 16.5" High (Less Legs)
- 4" Legs
- 50 12oz drinks @ 45° or less per hour
- Allow for 6" rear & side clearance around unit for air flow
- 3/8" water connection
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- Electrical: 120v - 60 Hz
- Condensate Drain into drip pan
- Shipping Weight: 80 lbs

Accessories Checklist:



CR-3741

Primary High Pressure
CO2 Regulator for
CO2 tank



CR-LD38JG

Inline Leak detector, and audio alarm
and Auto-water shut off device.
For use with CP2000 series systems



CR-14FCP with Prefilter CR-14FC without Prefilter

Single Filter System with Compact
Fibredyne filters, 3/4" inlet & outlet.
19" High x 17" Wide 5 gpm, 30,000 gal,
TOC & 1/2 micron filtration



CR-Kit-CPCT

Kit includes fittings needed to complete the installation of
CR-14FC filter system to Countertop CP2000-CT2
Includes: Pressure Regulator, fittings, and extra tubing
CP2000 Series Only

Customer supplied CO2 Tank required



ETL Sanitation Listed

Intertek

