

Project:



Scan for more info!

Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CP2000-CT3

Pull Handle Faucets, Countertop Mount




*Mirrored finish available upon request

Low volume sparkling, chilled still and chilled still water on tap

- Perfect for office, hotel suites, wineries & residential
- Cold carbonation for better long lasting sparkling water
- Compact size for the least intrusive counter space usage
- Designed for dispensing individual servings in a beverage cup
- 304 stainless steel brushed finish*

Specifications

- 50, 12oz drinks per hour @<40°
- Self-contained refrigeration system
- Compressor: 1/9 H.P.
- Operating temperature range: 40°-100°
- Electrical: 120v - 3.5 Amps
- Carbonator: 1 GPM
- Water Bath: 2.5 Gallons
- Ice Bank: 6 lbs
- Weight: 80 lbs
- Clearance: 9"
- 12"W x 26"D x 20.75"H
- Stainless Steel water coils
- Reverse Osmosis Compatible

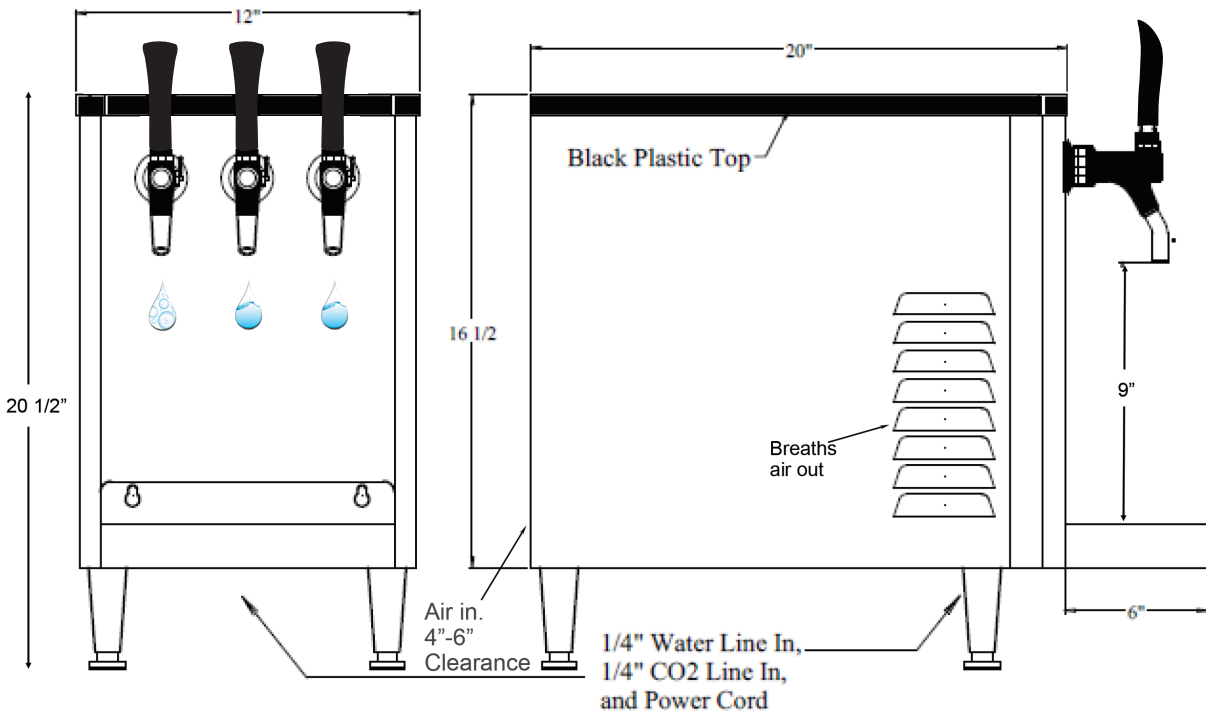

- Air intake at rear
- Allow for 6" rear & side clearance around unit for air flow
- 4.25" legs
- 1/4" water connection
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- 7' Overflow drain hose

Accessories:

□ CR-14FCP with Prefilter

□ CR-14FC without Prefilter

Filtration systems feature one 4FC Fibredyne technology, quick change, sanitary cartridge. T.O.C. capacity 15,000 gal at 2.5 GPM.



□ CR-KIT-CPCT

Kit includes fittings needed to complete the installation of CR-14FC filter system to Countertop CP2000-CT2. Includes: Water pressure reducer valve, fittings, and extra tubing CP2000 CT Series Only



□ CR-SDL-1

Single sanitary dispense lever that attaches to a self closing faucet on unit. 1 per faucet. Great for self-service hands-free dispensing applications.



□ CR-PC160-14FCV

Primary High Pressure CO2 Regulator for CO2 tank



□ CR-CWB1

□ CR-CWB2

Cylinder safety restraint wall bracket



□ Customer supplied CO2 Tank required

