

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CP-JR-CT2FR-PB-K

Push button, countertop mount




*Mirrored finish available upon request

Low volume sparkling & chilled water on tap


- Perfect for office, hotel suites, wineries & residential
- Cold carbonation for better long lasting sparkling water
- Compact size for the least intrusive counter space usage
- Designed for dispensing individual servings in a beverage cup
- Blue LED illuminated push and hold to dispense buttons
- Integrated CR-12FC filter and water pressure reducer valve
- 304 stainless steel brushed finish faucet plate and drip pan*

Specifications

- 40, 8oz drinks per hour @ <40°
- Self-contained refrigeration system
- Compressor: 1/9 H.P.
- Operating temperature range: 40°-100°
- Electrical: 120v - 3.5 Amps
- Carbonator: 1 GPM
- Water Bath: 1 Gallon
- Ice Bank: 3 lbs
- Weight: 60 lbs
- Clearance: 7.375"
- 10.75"W x 18.125"D x 17"H
- CR-3741 - CO2 regulator
- CR-LBS10JG - Leak block sensor
- All fittings needed for installation

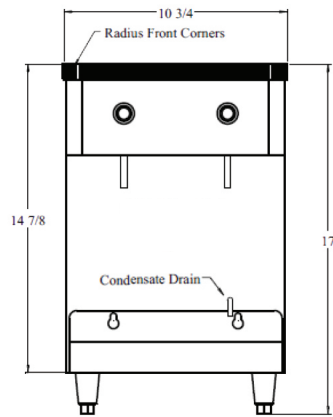

Blue LED Push Button Valves with flow adjustment

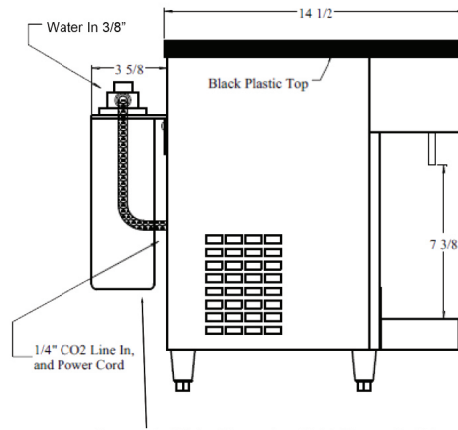

Pre-mounted Water filter system, Quick Change Cartridge.

Filter rated at 1.5 gpm, 6,000 Gallons.

1/2 Micron particulate reduction, taste, odor, color & contaminant reduction

- Air intake on left side
- Allow for 6" rear & side clearance around unit for air flow
- 2.5" legs
- Pre-mounted water filter system with 2FC quick change cartridge
- Filter rated at 1.5 gpm, 6,000 Gallons
- 1/2 Micron particulate reduction, taste, odor, color & contaminant reduction
- Includes 50 psi water pressure reducer valve
- 3/8" water connection
- 7' CO2 hose with 1/4" flare fitting
- 9' Electrical cord NEMA 5-15 plug
- Condensate drain into drip pan

Complete installation kit is included with purchase of unit

The unit comes standard with a filter system built on and a water pressure reducer valve installed. Installation kit comes complete with a CO2 regulator, leak block sensor, hose and angle stop fittings.



CR-PC160-14FCV
CO² regulator

+



CR-LBS10JG
Leak block
sensor

+



PASPP6 fitting
Angle stop
fittings

=



Included
installation kit

Accessories:

- **2FC replacement filter**
Replacement water filter
Compact fibredyne cartridge
for CP-JR models



- **CR-SDL-1**
Single sanitary dispense lever that
attaches to a self closing faucet on unit.
1 per faucet. Great for self-service
hands-free dispensing applications.



- **Customer supplied CO2 Tank required**
- **CR-CWB1**
Cylinder safety restraint wall bracket

