

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CR-UCM-MS

Chilled Sparkling & Still Water Remote chiller unit




Sparkling & chilled still water on tap

- Cold carbonation for better, long lasting sparkling water
- Designed for undercounter or remote applications up to 10' from draft tower
- Compact design for tighter spaces
- Water dispensing temperatures average between 34-40°
- Use with our CBR towers.
- Use with our CR-24FC twin filter system

Specifications

- 37 liters/10 gal per hour @<40°
- Self-contained refrigeration system
- Compressor: 1/5 H.P.
- Refrigerant: R134a CFC-free
- BTU: 2,200 per hour Ave
- Operating temperature range: 40°-100°
- Electrical: 120v - 4 Amps
- Water Bath: 3 Gallons
- Ice Bank: 7 lbs
- Weight: 80 lbs
- 12.5"W x 18.75"D x 24.5"H

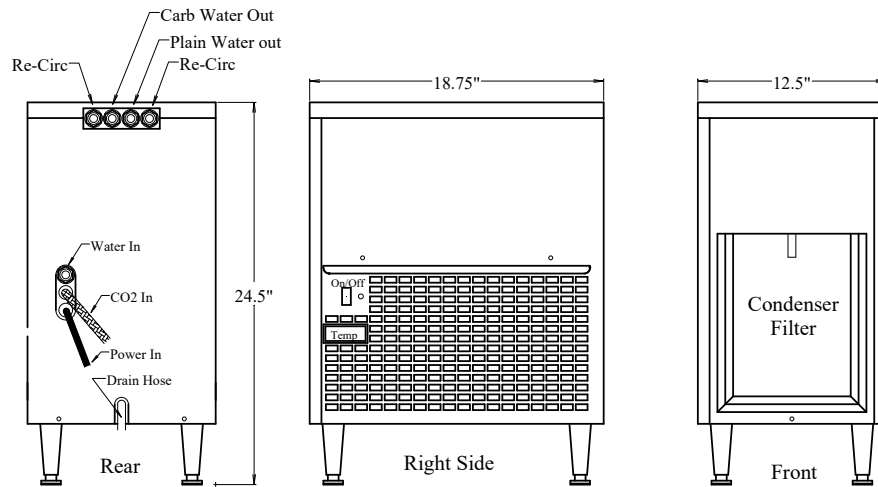

- Water inlet: 3/8" push-in
- 7' Over flow drain hose
- 9' 120v electrical cord
- Remotely locate system up to 10' away from tower
- 4.25" legs or S1318-SET slides leveling feet

- Allow for 8" of clearance above the unit for service and access to water bath
- Allow for side clearance around unit for exhaust airflow
- Allow for 3" clearance in the rear for connections

Accessories

- **CR-24FCP with Prefilter**
- **CR-24FC without Prefilter**

Twin filter system with compact fibredyne filters, 19"H x 17"W, 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



- **CR-KIT-UCM**

Installation Kit for remote chiller units, UCM1 & UCM2, includes: 5ft of CR-4L38 trunkline, various fittings and oetiker clamps, extra tubing and insulation to install the filter system, CR-UCM# and CBR or CM tower



- **CR-PC160-14FCV**
 - **Customer supplied CO2 Tank required**
- Primary High Pressure CO2 Regulator for CO2 tank



- **CR-CWB1**
 - **CR-CWB2**
- Cylinder safety restraint wall bracket



- **CR-ABUCM Air Baffle Accessory**
- Air baffle recommended anytime a remote chiller is installed in a cabinet



- **CR-TFB1**
- Thermostatic fan box recommended anytime a remote chiller is installed in a cabinet



- **CR-WMB1 Wall Mount Bracket for CR-UCM1**



- **CR-4L38**
- Four line insulated trunk line 3/8" Two Product, two recirculating 5' is included in Remote Chiller Install Kit



CR-UCM-MS for use with Crysalli Draft Towers only
See Draft Tower specs for model selection

