

Project:



[Scan for more info!](#)
Owners manual
Quick install
Quick sizing
Install layout
Parts list

CR-CPSW-DI

**Drop-in, still water
Glass filling station**



Chilled still water only on tap


- Non-mechanical, ice cooled chilling. Manual fill: 40lbs ice storage
- All stainless steel construction
- CBR-V1 Chrome cobra style draft tower built in
- Stay-open or self-closing action faucet
- Plug & play design. Shipped fully assembled
- Designed for use with CR-24FC water filter system

Specifications

- Single faucet draft tower
- Insulated ice bin with integrated multi-loop cold plate and sliding lid: 40 lbs storage
- Weight: 90 lbs
- Bottle clearance: 12.5"
- Dimensions: 17.125"W x 24.875"D x 40"H
- Top lip trim dimensions: 17.125"W x 24.875"D
- Unit requires countertop cut out
Countertop cut out dimensions: 15.375"W x 23.375"D

Optional:

- Sanitary dispense lever on faucet (CR-SDL-1)
- Sparkling & chilled still configuration with 2 tap draft tower (CR-CPS-DI)

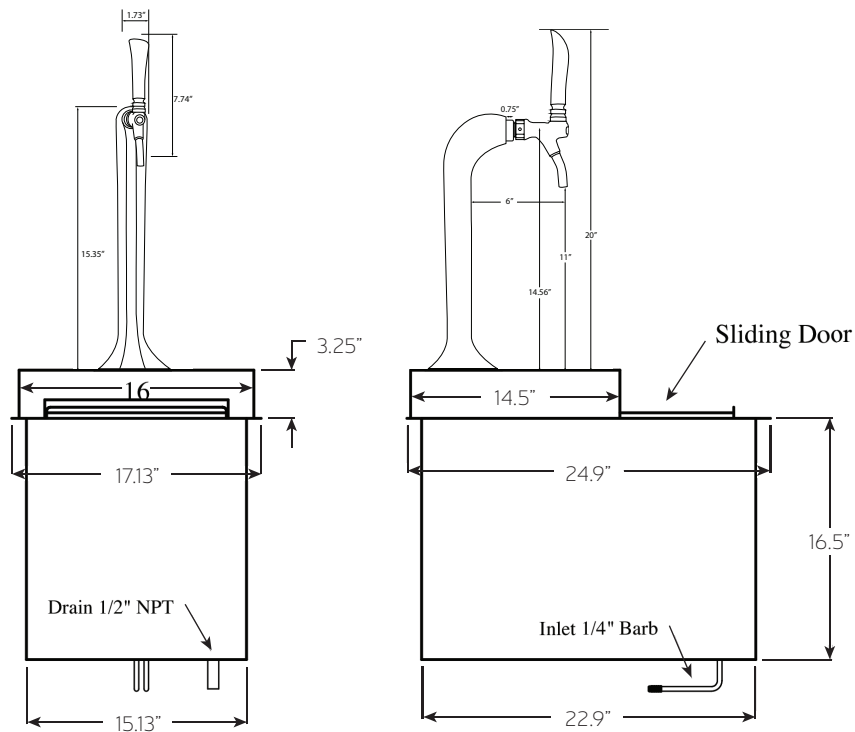

- 3/8" Water inlet connector
- 3/8" Drain pan hose 6'

- 1/2" ice bin drain fitting
- Slide open bin door

Accessories:

□ CR-KIT-CPS

Installation Kit for CR-CPS model series, includes: water filter fittings, angle stop adaptor and 8 feet of 3/8" hose



□ CR-24FCP with Prefilter

□ CR-24FC without Prefilter

Twin filter system with compact fibredyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration



□ CR-SDL1 (Optional)

Sanitary dispense lever.

