

Project:



Scan for more info!

Owners Manual
Quick Install
Quick Sizing
Install Layout
Parts List

CM-2PB
**Counter Mount Push Button
Dispensing Tower**



Sparkling & chilled still water
Two valve counter mount
Tower Options:


- CM-2PB** Detachable drain pan
- CM-2PB-RDP** Recessed drain pan

10.25"W x 8.75"D x 18.5"H


Specifications

- Faucet flow rate: 1.5-2 oz per second
- Two valves for sparkling and chilled still water
- Clearance: 12" bottle filling clearance
- Blue lit LED Push Button switches, push and hold to dispense
- For use and pairing with CR-UCM1 or CR-UCM2 Remote Chillers
- Lift off drip pan
- Mirrored stainless steel finish
- Weight: 11 lbs


CM-2PB

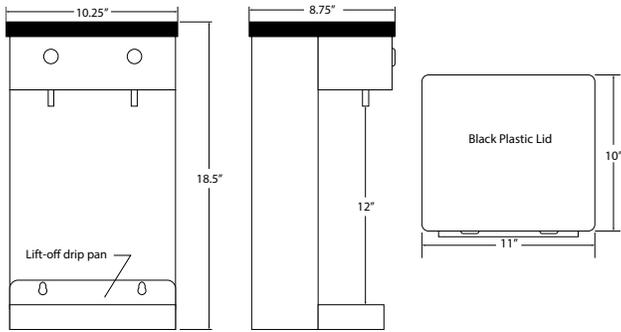

CM-2PB-RDP

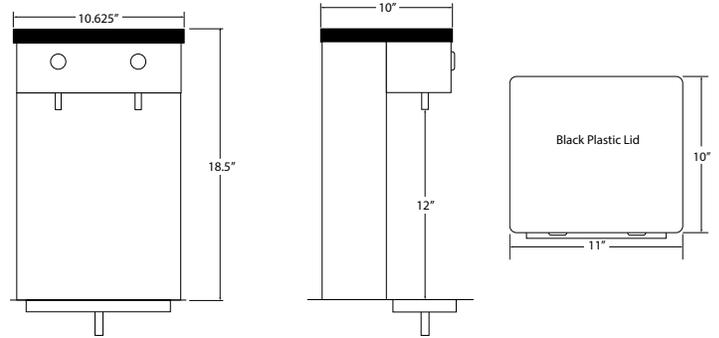

Recessed drain pan (RDP) Cutout dimensions

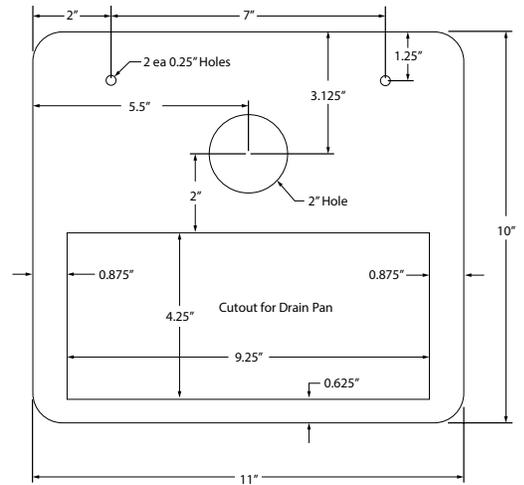

For use with:

□ CR-UCM1

Remote chiller unit
50 ltr per hr @<40°
Up to 30ft max trunk line run
Sparkling and chilled still water

□ CR-UCM2

Remote chiller unit
80 ltr per hr @<40°
Up to 40ft max trunk line run
Sparkling and chilled still

□ CR-KIT-UCM

Installation kit for remote chiller units, UCM1 & UCM2, Includes: LBS-10JG leak block sensor, 5 ft of CR-4L38 trunkline, various fittings and oetiker clamps, extra tubing and insulation to install the filter system, CR-UCM# and CBR or CM tower

