



## ***The Serenity Series: Serenity-CBRM***

**A Water Dispensing System**

**Cold - Consistent - Refreshing**

**Chilled Sparkling & Still Water**

*Water sustains life, Crysalli Serenity sustains a Life Style.*



## ***The Serenity Series System:***

### **-CBRM is made up of:**

CBR-V2C-MINI Tower

CP-JR-UC-BH Chiller Carbonator Power Pack

CR-12FC Submicron Water Filter System

CR-KIT-JRUC Install Fitting Kit

CR-LBS10JG Leak Block Sensor

CR-3741 CO2 Regulator



**Cold - Consistent - Refreshing**



### **CBR-V2C-MINI Tower**

The cobra style tower is a low profile elegant looking tower with a chrome finish. It is equipped with two matching stainless steel, adjustable flow faucets and ergonomically friendly, sleek tap handles that allows the tower to be positioned under low overhead cabinets or on tall counters. The look of the draft tower is what are often found in high end bars and restaurants but sized to fit the ambiance and subtleness of a home or office.


### **CP-JR-UC-BH Chiller Carbonator Power Pack**

Proudly made in the USA, this in-cabinet mounted chiller has a high capacity refrigeration system with an internal cold carbonator, capable of dispensing forty 8 oz drinks at 45 degrees or less an hour. An internal flow control device lets you regulate and set the flow of the sparkling water dispensing from the Serenity Tower Faucet. Quick connect fittings and a compact size of 11"x12"x18" makes installations easy. 120 volt. 40-100 degree operating range. Provide ventilation into the cabinet to exhaust heat from refrigeration system running.

CBR-V2C-MINI Tower

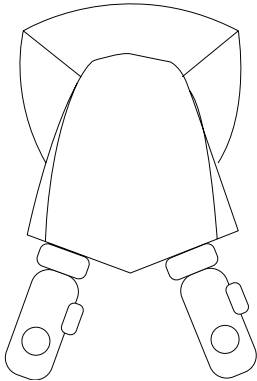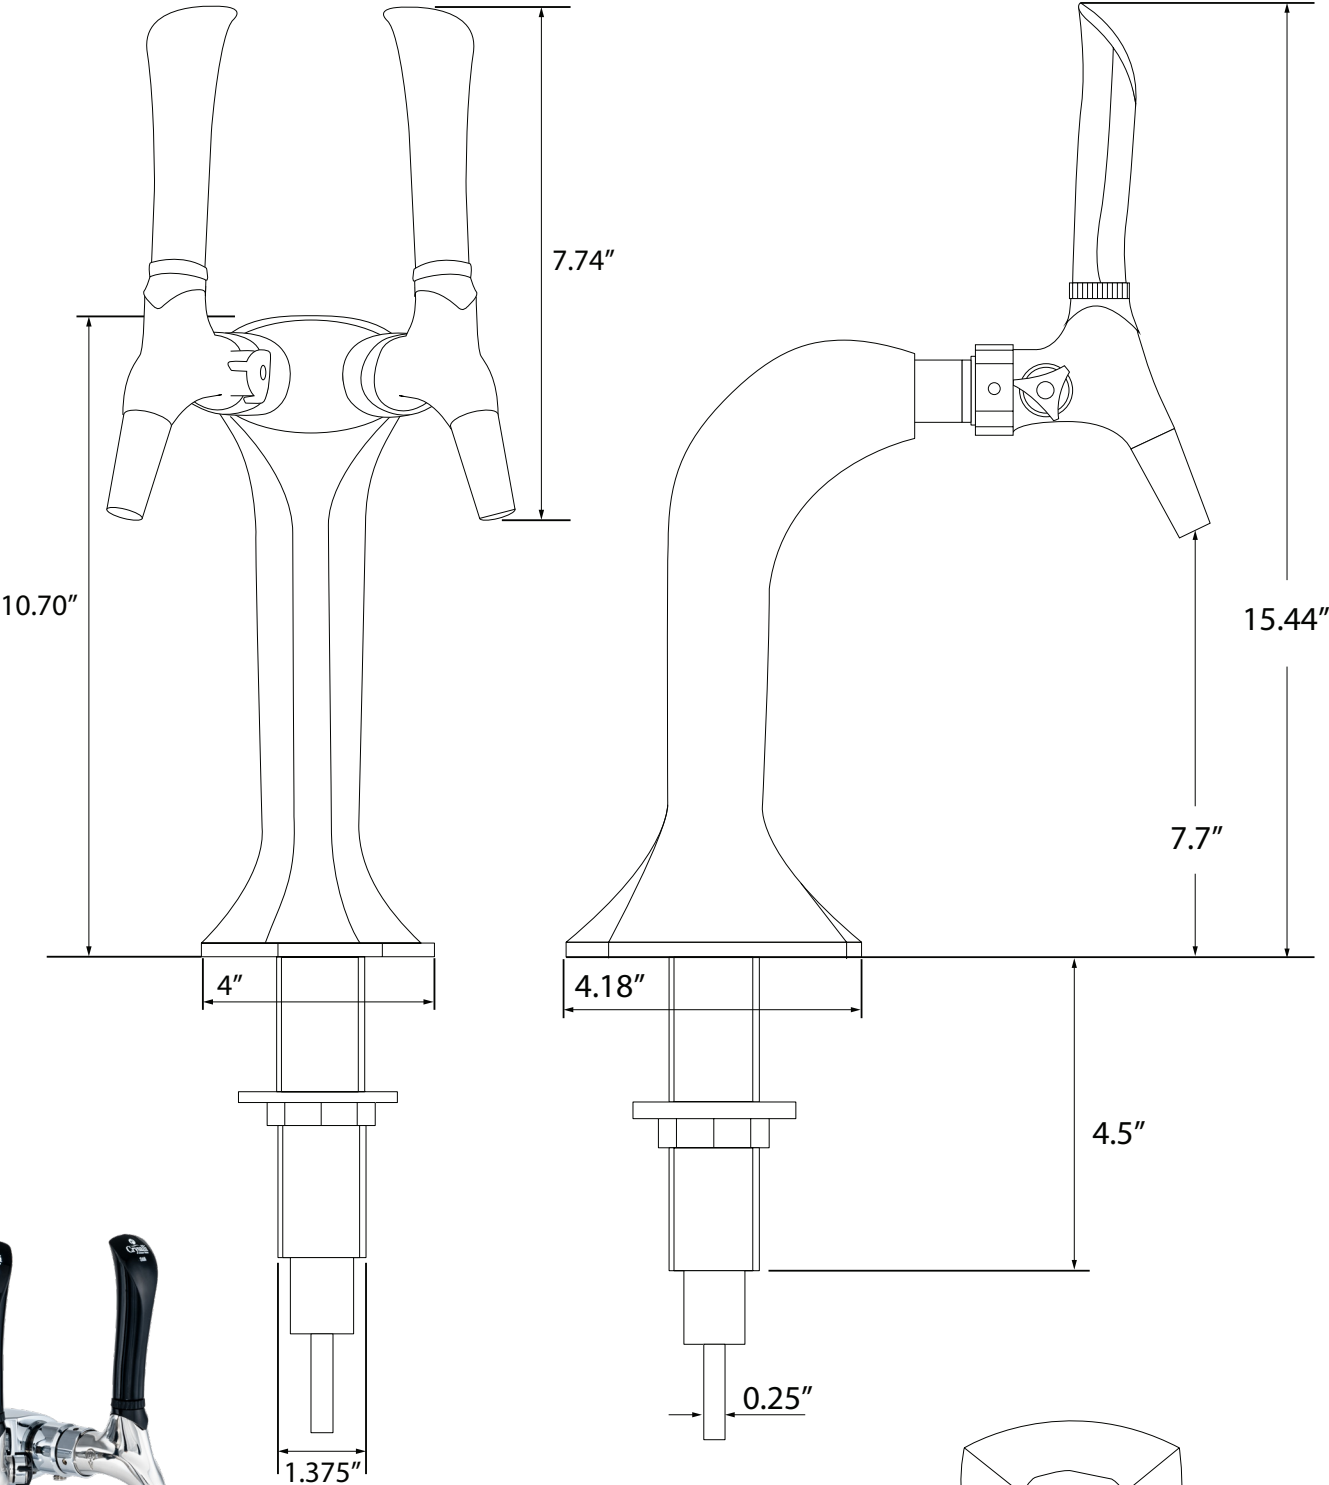

## CP-JR-UC-BH Chiller Carbonator

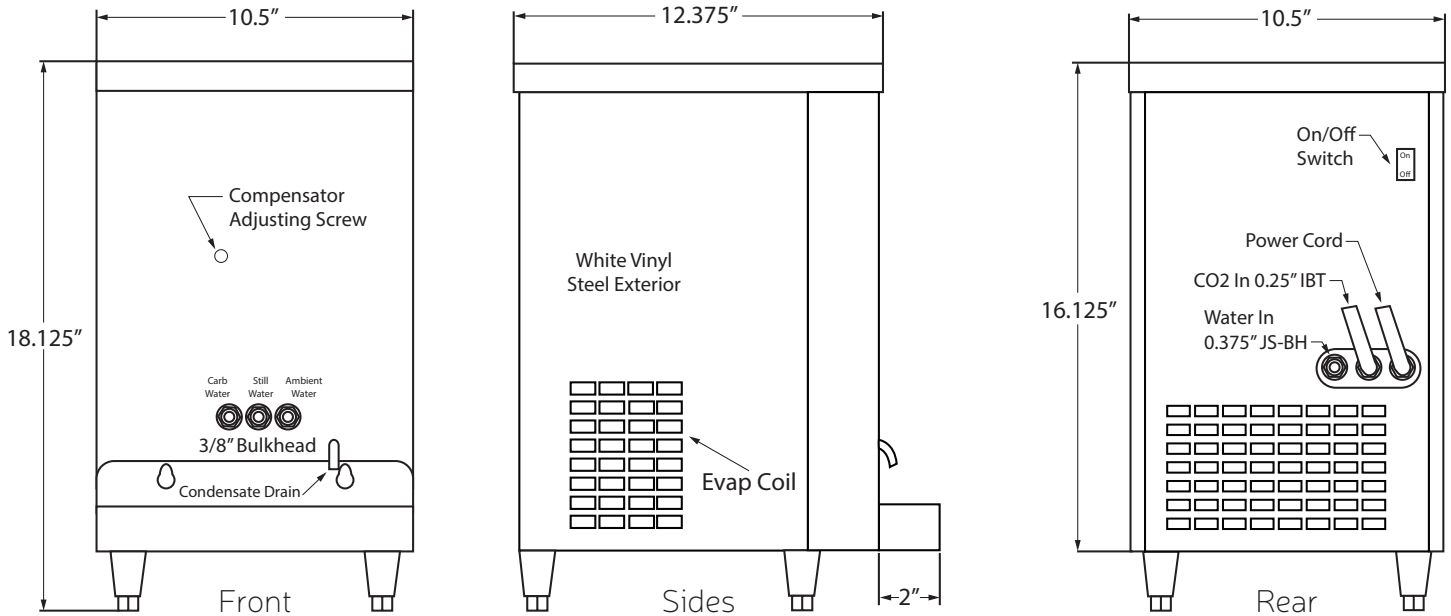

- Capacity: 40, 8 oz drinks per hour at <45 degrees.
- Cold Sparkling, Cold Still and Room Temp Still outlets.
- Water bath, ice bank refrigeration system to chill.
- Allow for 3"-5" clearance around unit for air flow.
- Ventilation into cabinet for refrigeration system is highly recommended to remove heat.
- Unit should be positioned within 4' of Serenity Faucet.
- 3/8 Water inlet connection
- 7' CO2 hose with 1/4" fitting for CO2 Regulator
- 120 VAC/ 60 Hz./ 1 Phase, 3.5 Amps, 8' Electrical cord and plug (NEMA 5-15)
- Shipping Weight: 60 lbs.
- CO2 Tank not included, source & fill locally
- Note: Refrigeration and Pump do create noise. Noise level can be influenced by cabinet and room

## CR-12FC Submicron Water Filter System



- Flow Rate: 1.5 gpm
- Capacity: 6,000 gallons
- Built-in quick connect inlet and outlet fittings.
- Mount in cabinet, with at least 3" of space below filter
- Sanitary quick change cartridge that can be recycled.
- Effectively filters dirt and particles as small as 0.5 micron in size by mechanical means.
- Reduces chlorine taste & odor and other offensive contaminants that can adversely affect the taste and quality of sparkling and still water.
- NSF/ANSI Standard 42 class I and 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means.
- Replace cartridge when flow rate becomes inconveniently slow from faucet still water or at least once per year.



## CR-KIT-JRUC Installation Fitting Kit



- Complete install kit with adaptor fittings for angle stop, 25' of 3/8" hose, water pressure reducer valve and insulation tube and tape (screws to mount filter head not included)
- Also includes the following:



### CR-PC160-14FCV High Pressure CO2 Regulator



- CO2 Regulator connects to standard CO2 tanks
- Upper top gauge shows outgoing CO2 pressure to system: pressure should be set to 75 PSI for optimum sparkling water profile
- Lower left side gauge shows fill level of CO2 tank. Tank is empty and should be replaced when needle is in the red


CO2 Tank is not included with system

#### Examples of tanks



Source and fill tanks locally. Tank life will vary with its size and usage of the system

A 5 pound tank can typically carbonate 25 gallons (3,200 oz) of water

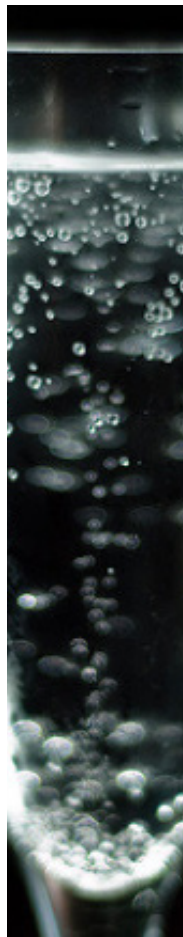

### CR-LBS10JG Leak Block Sensor



- Peace of mind; protect your cabinet and floors from a leak
- In-Line Leak detector with alarm and auto shut off
- Auto Shut-off of the water at the solenoid when water is detected
- Auto shut-off & beep when battery needs replacement
- Uses 9 Volt Battery (included)

Looking for a different style faucet tower? Contact us about configuring this system with the CR-X3PB-COMP tower.





1739 Sabre St

Hayward, CA 94545

510-732-0100

[www.crysalli.com](http://www.crysalli.com)

7.20.22